



SPRAYBOOTHS.NET

CARGO BOOTHS PRODUCT LINE

STEALTH CARGO

HEATER / LowNox

OPEN FACE

DELTA CARGO

DELTA PREP 250

MIXING LAB

VECTOR CARGO

TRUCK XLR

ACCESSORIES






VECTOR CARGO


SEMI-DOWN DRAFT TRUCK BOOTH

150	LENGTHS	LIGHTING	DOORS	FILTRATION	HEATING	AIRFLOW	FAN SIZE	MOTOR
	40'/45'/50'	30 / 36 / 42	4 - 3'W	48 EXHAUST / 6 INTAKE	UPGRADE	16,900	34" / 42"	7.5Hp / 10Hp

PRICE MEETS PERFORMANCE

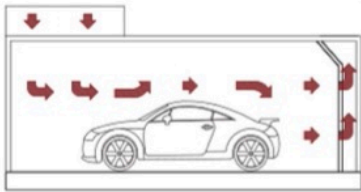

The **VECTOR CARGO**, is a quality and economical booth made for performance and durability. This Truck booth was created for start-up and small shops with bigger projects and still an economical booth. As seen on the left, air enters the booth through the top-front filtered plenum and is exhausted at the rear-center plenum.



ECO CARGO

FRONT AIR FLOW TRUCK BOOTH

Truck XLR, air enters the booth through the top-front filtered plenum and is exhausted at the rear-center plenums. The same boost power technology that runs the Semi-Down 200 can be found in this giant workhorse.



LENGTH	40'
LIGHTING	30 FIXTURES
FILTRATION	36 EXHAUST / 36 INTAKE
AIRFLOW	42" TUBE AXIAL FAN / 18,500 CFM
MOTOR	7.5HP-3PH-240v

Based on model RGI-FAF40XLR




DELTA CARGO[®]

S=8 9-DOWN DRAFT TRUCK BOOTH

250								
	LENGTHS	LIGHTING	DOORS	FILTRATION	HEATING	AIRFLOW	FAN SIZE	MOTOR
	40' / 45' / 50'	30 / 34 / 42	& - 3'W	30 EXHAUST / 15 INTAKE	UPGRADE	16,900	4 / 24" - 30"	3Hp / 5Hp

GREATER PERFORMANCE

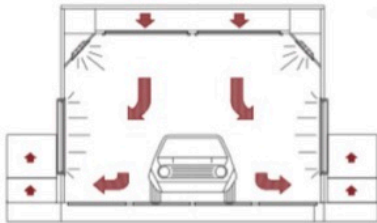

The **DELTA CARGO** pulls clean air from the upper fully filtered ceiling and exhausts the air through both lower side plenums.

Heavy Duty Construction:
Our booths are constructed of 18-gauge, pre-punched single or double wall panels. Our design allows for easy assembly.

SAVE TIME AND MONEY



DELTA PREP 250

Delta Prep 250, air enters the prep-station through the fully-filtered ceiling plenum and is then exhausted at the lower side exhaust plenums. The same great power that runs the Side Down 100 can be found in this economical option.

LENGTH	24'
LIGHTING	8 FIXTURES
FILTRATION	16 EXHAUST / 4 INTAKE
AIRFLOW	30" TUBE AXIAL FAN / 12,000 CFM
MOTOR	(2) - 2HP-3PH (240v)

Based on model RGI-DPSDD 24




STEALTH CARGO

DOWN DRAFT TRUCK BOOTH

350

LENGTHS	PITS	LIGHTING	DOORS	FILTRATION	HEATING	AIRFLOW	MOTOR
40' / 45' / 50'	3 Pit	30 / 36 / 48	4 - 3'W	15 INTAKE	UPGRADE	34" / 42"	7.5Hp / 10Hp

MAXIMUM PERFORMANCE

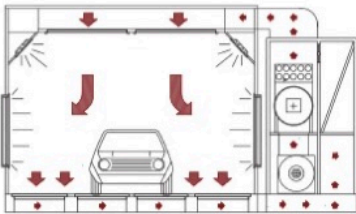

The Stealth Cargo 350 pulls clean air from the upper fully filtered ceiling and exhausts the air through fully filtered floor plenum.

Heavy Duty Construction:
Our booths are constructed of 18-gauge, pre-punched single or double wall panels. Our design allows for easy assembly.


DECREASED
LABOR / ENERGY



INCREASED
EFFICIENCY / PROFIT

THE 350 DIFFERENCE

In business time is money. By dramatically increasing your power and heat cycle, you will be able to increase your turn-around dramatically. Not only are you saving on time, but also on labor and energy costs. The daily cost of booth operation is lowered tremendously when compared to the increased number of vehicles you can turn-around in one day, compared to a lower-end booth. So in the end, you get faster performance and turn-around at a lower energy consumption cost per vehicle. In business, lowering your overhead and labor is always the key to success.

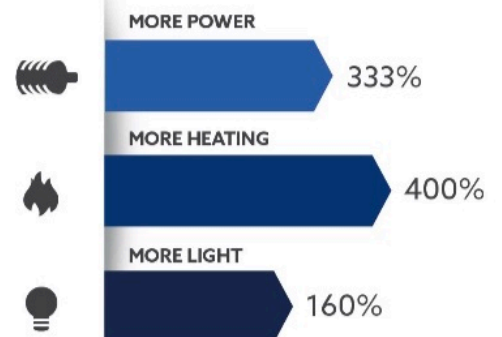

*COMPARED TO THE 250 SERIES



HEATERS / LOWnox

Our heaters has the power to increase the speed of your bake cycle by over 400%, compared to standard chemicals. Get cars out in a matter of hours instead of days. Renders ultra smooth, high-quality gloss finish as opposed to the unfavorable orange-peel texture.

INSTALLATION	INDOOR or OUTDOOR
CONFIGURATIONS	VERTICAL, HORIZONTAL, SUSPENDED, MOUNT
BTUs	400,000 - 1,000,000 / 2,500,000
SPRAY TEMP	55 - 90 DEGREES
BAKE TEMP	90 - 160 DEGREES
MOTOR	V.F.D. POWER



OPEN FACE

Open Face is efficiently made to save space and time. It is ideal for painting smaller parts, or projects. They are available in all sizes and for every industry, such as woodwork, jamming, or powder-coating. The booth intakes air through the open face and exhausted through a filter system in the rear.

LIGHTING	2 UPPER
FILTRATION	26 EXHAUST
AIRFLOW	12,900 CFM
FAN	30" TUBE AXIAL
MOTOR	(1) - 3HP-3PH (240v)

Based on model RGI-HOF 101010



MIXING LAB

Mixing Lab allows shops to safely mix and store their own paints according to state regulations and laws. Air enters the booth through the fully filtered ceiling plenum, and is exhausted at the lower, side, exhaust plenums.

FILTRATION	2 INTAKE
AIRFLOW	1,800 CFM / 8" BLOWER
MOTOR	(1) - 1/4HP - 1PH-120V MOTOR



SPRAYBOOTHS.NET

410 E. GRANT LINE RD. BLDG 1
TRACY, CA 95376

PH 209 . 831 . 9209
FX 209 . 666 . 2089
INFO@SPRAYBOOTHS.NET

VIEW OUR FULL PRODUCT LINE AT
WWW.SPRAYBOOTHS.NET



AUTHORIZED DEALERS



NOW LOOKING FOR DISTRIBUTORS
EMAIL US AT: INFO@SPRAYBOOTHS.NET